

**BEST AVAILABLE COPY**

**(12) PATENT APPLICATION**  
**(19) AUSTRALIAN PATENT OFFICE**

**(11) Application No. AU 199965521 A1**

**(54) Title**  
**Stirrup for horseback riding**

**(51)<sup>7</sup> International Patent Classification(s)**  
**B68C 003/02**

**(21) Application No: 199965521**

**(22) Application Date: 1999.12.30**

**(30) Priority Data**

**(31) Number**  
**9816753**

**(32) Date**  
**1998.12.30**

**(33) Country**  
**FR**

**(43) Publication Date : 2000.07.06**

**(43) Publication Journal Date : 2000.07.06**

**(71) Applicant(s)**  
**Ukal**

**(72) Inventor(s)**  
**Patrick Lelievre**

**(74) Agent/Attorney**  
**CALLINAN LAWRIE, Private Bag 7, KEW VIC 3101**

DESCRIPTIVE ABSTRACT

\*\*\*\*\*

Stirrup for Horseback Riding

The present invention relates to a stirrup (1) for horseback riding.

Stirrup for horseback riding formed by two branches connected to the ends of a bearing support (tread) for the foot of the rider mounted pivotably about an axis connecting the two branches, characterized in that said bearing support (3) is also mounted with a possibility of vertical or substantially vertical movement relative to said branches (2) of the stirrup (1).

The present invention can be used in the field of horseback riding, in particular for facilitating teaching or practice of horseback riding.

- Fig. 1 -


The claims defining the invention are as follows:

1. Stirrup for horseback riding formed by two branches connected to the ends of a bearing support for the foot of the rider (tread) mounted pivotably about an axle connecting the two branches, characterized in that said bearing support (3) is also mounted with the possibility of vertical or substantially vertical displacement relative to said branches (2) of the stirrup (1).

2. Stirrup according to claim 1, characterized in that each branch (2) comprises at its end (4) at least one plate (5, 6) comprising an oblong hole or slot (7) extending substantially vertically relative to said branches (2) and adapted to receive a corresponding end of the bearing support (3) or an end of an axle (8) passing through and carrying pivotally said bearing support (3).

3. Stirrup according to claim 1 or 2, characterized in that each branch (2) comprises at its end (4) two end plates (5, 6) each comprising an oblong hole or slot (7) extending substantially vertically relative to said branch (2), said holes being aligned with each other and adapted to receive a corresponding end of the bearing support (3) or an

Fig-1

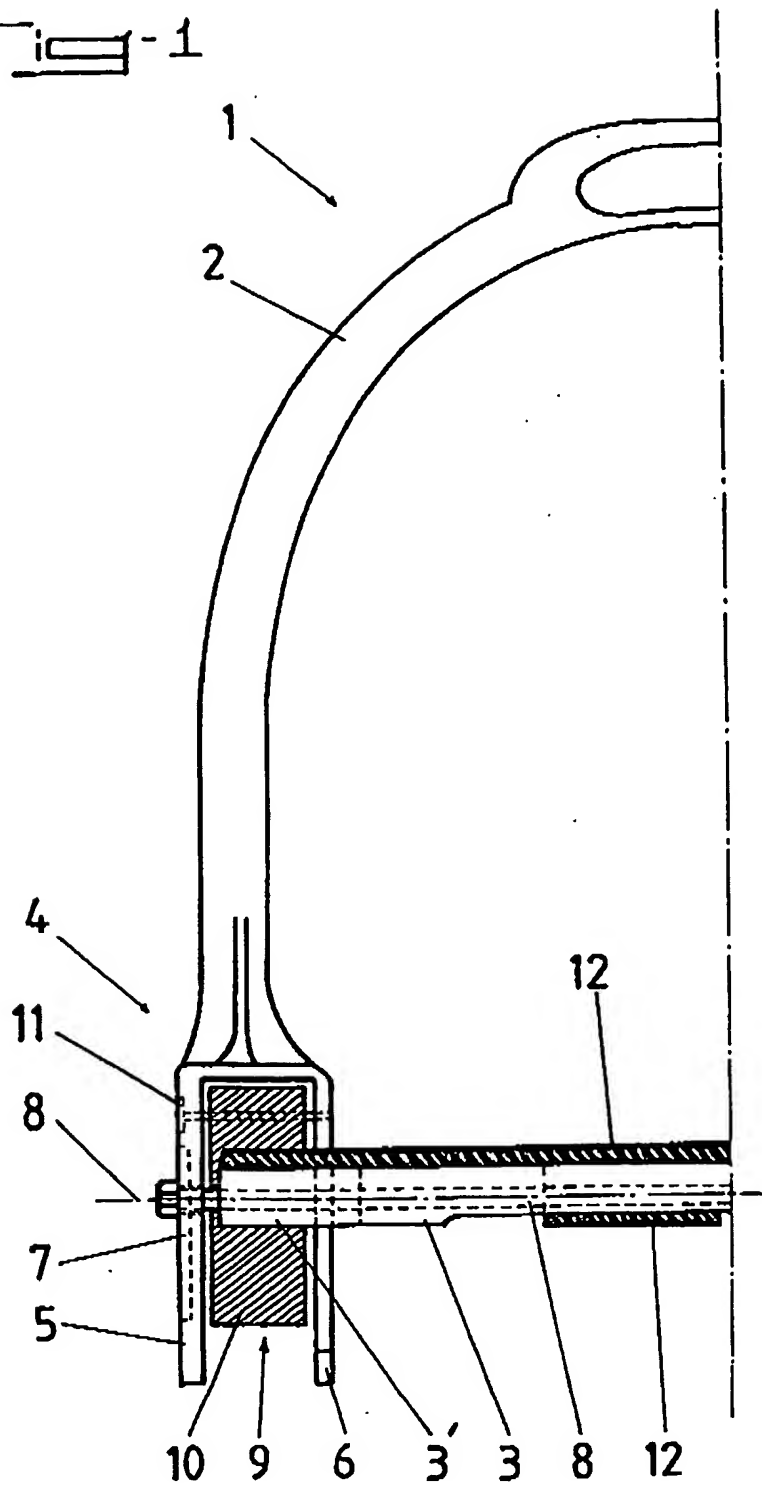

**AUSTRALIA**

**Patents Act 1990**

**COMPLETE SPECIFICATION**

**FOR A STANDARD PATENT**

**ORIGINAL**

---

**TO BE COMPLETED BY APPLICANT**

**Name of Applicant:** UKAL

**Actual Inventor:** PATRICK LELIEVRE

**Address for Service:** CALLINAN LAWRIE, 711 High Street, Kew, Victoria 3101, Australia

**Invention Title:** STIRRUP FOR HORSEBACK RIDING

The following statement is a full description of this invention, including the best method of performing it known to me:-

---

## DESCRIPTION

The present invention relates to the field of horseback riding, in particular as to accessories for the practice of horseback riding and more particularly as to stirrups.

In horseback riding, the rider is subjected, at each stride and each jump of his mount, to the movements of his horse. The pressure exerted by the movement of the horse on the rider can be broken down into a vertical component and a horizontal component of pressure.

To adsorb the different components as well as the resultant, the rider smooths out the movements of the horse with his hips and his ankles when seated and with his knees and his ankles when jumping. When clearing an obstacle in the course of a jump, the contact of the pelvis of the rider with the saddle is avoided, the only thing bearing the rider being the stirrups. As a result, the stability of the rider and the precision of jumping are directly dependent on the quality of these latter.

There are known at present, in this field, two types of stirrups, namely fixed stirrups and articulated stirrups.

**Page(s)..... were not lodged**  
**with this application**

swings, which again decreases its interest. This type of tread even has the tendency, by the return effect of the spring mechanism, to press the foot of the rider in an undesirable direction, or to do likewise such that the tread comes into poor orientation relative to the sole of the foot of the rider when the contact of the tread with the foot is interrupted during a short period during which the spring returns the tread to the horizontal position. These phenomena have therefore a tendency to destabilize the rider instead of giving him increased control and safety.

Moreover, this type of stirrup is up to 75% heavier than a conventional non-articulated stirrup and therefore requires a certain period of adaptation on the part of the rider. Finally, these stirrups are also more cumbersome than conventional stirrups.

From the above, it follows that none of the known stirrups takes account of the vertical pressure of the rider, nor of the work of the knees of this latter.

The present invention has for its object to overcome at least certain of these drawbacks.

To this end, it has for its object a stirrup for horseback riding, formed by two branches connected to the ends of a bearing support (tread) for the foot of the rider mounted pivotably about an axle connecting the two branches, characterized in that said bearing support is also mounted for vertical or substantially vertical displacement relative to said branches of the stirrup.



This stirrup absorbs the principal shocks without offering rigid resistance. The tread of the stirrup slides vertically without advancing. The stirrup of the present invention thus promotes the inclination of the bearing support (tread) from the good side and maintains the leg in place. The resilient suspension means with which the stirrup of the present invention is provided, absorbs the enormous shocks created by the striking and landing while jumping obstacles.

The invention will be better understood, from the following description, which relates to a preferred embodiment, given by way of non-limiting example, and explained with reference to the accompanying schematic drawings, in which:

Figure 1 is a fragmentary front view of one embodiment of stirrup according to the present invention;

Figure 2 is a side view of the exterior of the stirrup of Figure 1;

Figure 3 is a fragmentary side view from within the stirrup of Figure 1, and

Figure 4 is a fragmentary top plan view of the stirrup of Figure 1.

Figures 1 to 4 show, by way of non-limiting example, a preferred embodiment of stirrup 1 according to the present invention.

As shown in particular in Figure 1, the stirrup 1 for horseback riding is formed of two branches 2 connected to the ends of a bearing support 3 (tread) for the foot of the rider mounted pivotably about an axle 8 directing the two

branches 2, said bearing support 3 being also mounted for vertical or substantially vertical displacement relative to said branches 2 of the stirrup 1.

5 The axle 8 can be a material axle, for example, a rod of cylindrical cross-section passing through the bearing support 3 from side to side as in the preferred embodiment shown in Figure 1.

10 In an embodiment (not shown), the axle 8 of pivoting of the bearing support 3 can also be replaced by an imaginary axis, the bearing support 3 being then retained on the end plates 5, 6 of the branches 2 of the stirrup 1 by the bias of lug coacting with reception sites for the lugs, disposed for example on the side walls of said terminal plates 5, 6.

15 Of course, said lugs can also be located on the end plates 5, 6, their reception sites being then directly formed in the bearing support 3. However, it will be noted that the modification comprising the material axle 8 has an advantageous effect on the solidity of the stirrup 1.

20 As shown in Figure 1, the passage of a symmetrical material axle 8 also permits fixing in a central manner an anti-skid sole 12 on the bearing support 3, as will be described later.

25 According to one characteristic of the invention, each branch 2 of the stirrup 1 comprises, at its end 4, at least one end plate 5, 6 comprising an oblong hole or slot 7 extending substantially vertically relative to said branches 2 and adapted to receive a corresponding end of the bearing

support 3 or one end of a through axle 8 pivotally carrying said bearing support 3.

5 This oblong hole or slot 7 permits vertical or substantially vertical displacement of the axle 8 of the bearing support 3 relative to the branches 2 of the stirrup 1. In cooperation with a shock absorbing and limiting means, the movement of said axle 8 is also controlled in its course within the oblong hole or slot 7, which imparts stability and comfort to the rider during the course of his mount and above all when jumping.

10 In the preferred embodiment shown in Figures 1 to 4, each branch 2 comprises at its end 4 two end plates 5, 6 each comprising an oblong hole or slot 7 extending substantially vertically relative to said branch 2, said holes being aligned with each other and adapted to receive a corresponding end of the bearing support 3 or an end of a through axle 8 and pivotally carrying said bearing support 3.

15 The end plate of plates 5, 6, the axle 8 itself or the corresponding end of the bearing support 3, are provided with securement means known per se, which permit retaining said axle 8 or said corresponding end of the bearing support 3 in the oblong hole or holes 7 (aligned) of said end plate or plates 5, 6.

20 According to another characteristic of the present invention, the stirrup 1 is characterized in that between the end plates 5, 6 of each branch 2 is disposed a means 9 for limitation and shock absorption of the vertical or substan-

tially vertical displacement of the bearing support 3 relative to said branches 2 of the stirrup 1.

5. This means 9 for shock absorbing and limitation of the vertical or substantially vertical displacement of the bearing support 3 relative to said branches 2 of the stirrup 1, can be in the form, for example, of a cylindrical receptacle closed at its ends and open on its two opposite lateral sides into which two springs, disposed on opposite sides, which is to say above and below the axle 8 or the corresponding lug, ensure shock absorption and/or limitation of the vertical movement or substantially vertical movement of the bearing support 3. This cylindrical receptacle can for example be welded to a single end plate or, as the case may be, welded between two facing end plates 5, 6.

10  
15  
20 Another embodiment shown in Figures 1, 2 and 4, shows that to maintain the means 9 on the terminal plate or between the two superposed terminal plates, said means 9 for limiting and shock absorbing for the bearing support 3, can be fixed on or between the end plates 5, 6 of each branch 2 by screws 11 or the like.

25 In a modified embodiment, the elasticity of the limiting and shock absorbing means 9 can be adjusted or selected to be different from that of the two branches 2. Thus, the bearing support 3 can be selected as being more movable from the side or the elasticity of means 9 is more important.

In the preferred embodiment mentioned and as will be seen clearly in Figures 1 to 4, the means 9 for limitation and shock absorption of the vertical or substantially vertical displacement of the bearing support 3, can be in the form of a resilient cushion 10 made of an elastic and/or resilient material through which passes the corresponding end of the bearing support 3 or the end of the through axle 8 and pivotally supporting said bearing support 3.

So as to guarantee an effective limitation and optimum shock absorption by means of the resilient cushion 10, it is provided that the dimensions of the hole in the resilient cushion 10, through which passes the corresponding end of the bearing support 3 or the end of the axle 8 of the bearing support 3, be substantially the same as those of the corresponding end of the bearing support 3 or the end of the axle of the bearing support 3.

In this way, the play between the axle 8 and the resilient cushion 10 will be reduced to the minimum and the resilient material can completely fulfill its role of limiting and/or shock absorbing the displacement of the axle 8 or of the corresponding end of the bearing support 3 in the oblong hole of the slot 7.

In this way, the play between the axle 8 and the resilient cushion 10 will be reduced to the minimum and the resilient material can completely fulfill its role of limiting and/or shock absorbing the displacement of the axle 8 or of

the corresponding end of the bearing support 3 in the oblong hole or slot 7.

5 The end plate or plates 5, 6 made of harder material (stainless steel, bronze ...) than the material of the means 9 have a geometry which, on the one hand, permits vertical displacement of the axle or of the end of the bearing support 3 via the dimensions of the oblong hole or slot 7 and, on the other hand, the pivotal movement of the bearing support 3 about its axis, by means of the side walls of the means 9, so as preferably to avoid any unfavorable phenomenon of blockage in the abutment.

10 It is only under conditions of extreme pivoting, or after too great wear on the means 9, that the side edge of the internal plate 6 can encounter the protuberant end 3' about which the bearing support 3 pivots (compare Figure 4, in which the branch 2 has not been represented for purposes of clarity).

15 Because of this, and apart from the case of too great wear, the blockage phenomenon in abutment of the bearing support 3 in the stirrup 1 of the present invention is not prevented in the cases in which such blockage can be necessary to retain an end movement of the foot of the rider and to permit him to regain control.

20 The pivoting of the bearing support 3 is therefore not as a general rule and except in really extreme cases, limited by the internal end plate 6 but is damped by the limiting and shock absorbing means 9 of vertical or substan-

tially vertical displacement of the bearing support 3 relative to said branches 2 of the stirrup 1.

The material used for the resilient cushion 10 can be selected from the group of elastic and/or resilient synthetic plastic materials as well as the group of elastic and/or resilient materials of natural origin. In particular, the resilient material of the resilient cushion 10 can be selected from the group of shock absorbing materials that have high resistance to wear and is preferably rubber.

As can be seen particularly from Figure 2, the direction of the branches 2 and the direction of the oblong hole or of the slot 7 for vertical displacement of the corresponding end of the bearing support 3 or the end of the axle 8 of the bearing support 3 form an angle comprised between  $10^{\circ}$  and  $40^{\circ}$ , preferably equal to about  $18^{\circ}$ , the upper end of the slot 7 in the end plate 5 being directed toward the rider when the stirrup 1 is used, which is to say when the branches 2 of the stirrup 1 are vertical.

The presence of this angle gives numerous supplemental advantages: first of all, the angle promotes the pivoting of the bearing support 3 to the good side, which is to say so as to lower the heel of the rider, and renders the reverse destabilizing movement substantially impossible; then, in the descending phase of the jump and at the end of the latter, the angle formed between the back of the rider in optimum reception position and the perpendicular to the longitudinal axis of the trunk of the horse inclined forwardly before landing,

is generally comprised between 10° and 40°. Because of this, the vertical pressure is offset by the same angle thanks to the stirrup 1 according to the present invention.

Moreover, Figure 1 also shows that the bearing support 3 can be provided with an interchangeable insert 12 known per se, of rubber material comprising skid patterns to ensure better adherence between the metallic bearing support 3 and the boot of the rider.

Following the example of parabolic skis or tennis racquets with a large mesh, the stirrup 1 of the present invention can be used in equestrian teaching, particularly to facilitate apprenticing beginners and rendering their lessons more comfortable and safe, and permitting them to make more rapid progress.

Of course, the invention is not limited to the embodiment described and shown in the accompanying drawings. Modifications remain possible, particularly as to the construction of the various elements or by substitution of technical equivalents, without thereby departing from the scope of protection of the invention.

Where the terms "comprise", "comprises", "comprised" or "comprising" are used in this specification, they are to be interpreted as specifying the presence of the stated features, integers, steps or components referred to, but not to preclude the presence or addition of one or more other feature, integer, step, component or group thereof.



The claims defining the invention are as follows:

1. Stirrup for horseback riding formed by two branches connected to the ends of a bearing support for the foot of the rider (tread) mounted pivotably about an axle connecting the two branches, characterized in that said bearing support (3) is also mounted with the possibility of vertical or substantially vertical displacement relative to said branches (2) of the stirrup (1).

2. Stirrup according to claim 1, characterized in that each branch (2) comprises at its end (4) at least one plate (5, 6) comprising an oblong hole or slot (7) extending substantially vertically relative to said branches (2) and adapted to receive a corresponding end of the bearing support (3) or an end of an axle (8) passing through and carrying pivotally said bearing support (3).

3. Stirrup according to claim 1 or 2, characterized in that each branch (2) comprises at its end (4) two end plates (5, 6) each comprising an oblong hole or slot (7) extending substantially vertically relative to said branch (2), said holes being aligned with each other and adapted to receive a corresponding end of the bearing support (3) or an

end of a through axle (8) and carrying pivotally said bearing support (3).

4. Stirrup according to claim 3, characterized in that between the end plates (5, 6) of each branch (2) is disposed a means (9) for limitation and shock absorbing of the vertical displacement or substantially vertical displacement of the bearing support (3) relative to said branches (2) of the stirrup (1).

5. Stirrup according to claim 4, characterized in that the means (9) for limitation and shock absorbing of the vertical displacement or substantially vertical displacement of the bearing support (3) is fixed on the or between the terminal plates (5, 6) of each branch (2) by screws (11) or the like.

6. Stirrup according to any one of claims 4 or 5, characterized in that the elasticity of the means (9) for limitation and shock absorbing is different in the two branches (2).

7. Stirrup according to any one of claims 4 to 6, characterized in that the means (9) for limitation and shock absorbing of the vertical or substantially vertical displacement of the bearing support (3) is made in the form of an elastic cushion (10) of an elastic and/or resilient material, through which passes the corresponding end of the bearing

support (3) or the end of the through axle (8) and pivotally supporting said bearing support (3).

5 8. Stirrup according to claim 7, characterized in that the dimensions of the hole in the resilient cushion (10), through which passes the corresponding end of the bearing support (3) or the end of the axle (8) of the bearing support (3), are substantially the same as those of the corresponding end of the bearing support (3) or of the end of the axle (8) of the bearing support (3).

9. Stirrup according to claim 7 or 8, characterized in that the resilient material of the resilient cushion (10) is preferably rubber.

10. Stirrup according to any one of claims 4 to 9, characterized in that the pivoting of the bearing support (3) is not limited by the internal end plate (6) but is shock absorbed by the means (9) for limitation and shock absorption of the vertical or substantially vertical movement of the bearing support (3) relative to said branches (2) of the stirrup (1).

11. Stirrup according to any one of claims 1 to 10, characterized in that the direction of the branches (2) and the direction of the oblong hole or slot (7) of vertical displacement of the corresponding end of the bearing support (3) or the end of the axle (8) of the bearing support (3) form an angle comprised between 10° and 40°, preferably equal to

about 18°, the upper end of the slot (7) in the end plate (5) being directed toward the rider when the stirrup (1) is used, which is to say when the branches (2) of the stirrup (1) are vertical.

10

Dated this 30<sup>th</sup> day of December, 1999

UKAL

By their Patent Attorneys:

CALLINAN LAWRIE

*John Macrae*

Fig-1

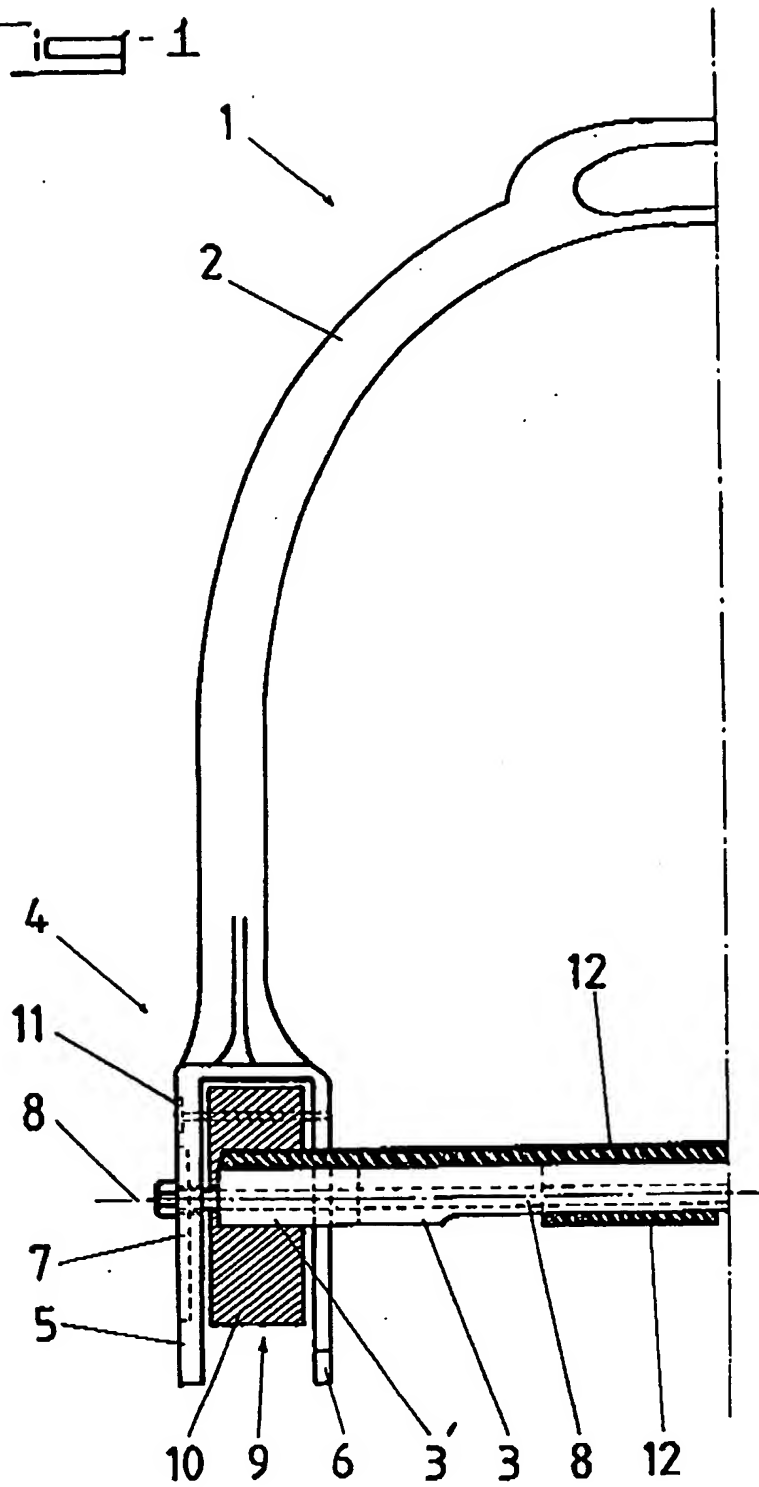


Fig-2

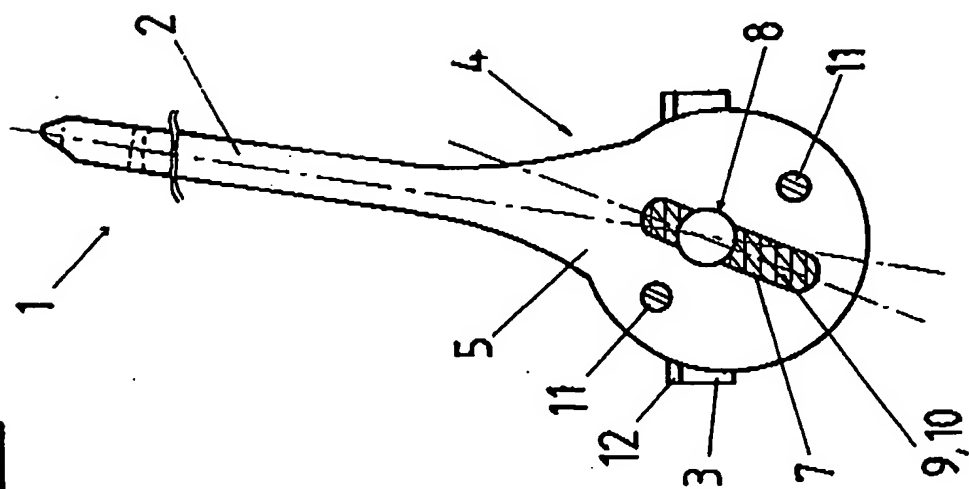
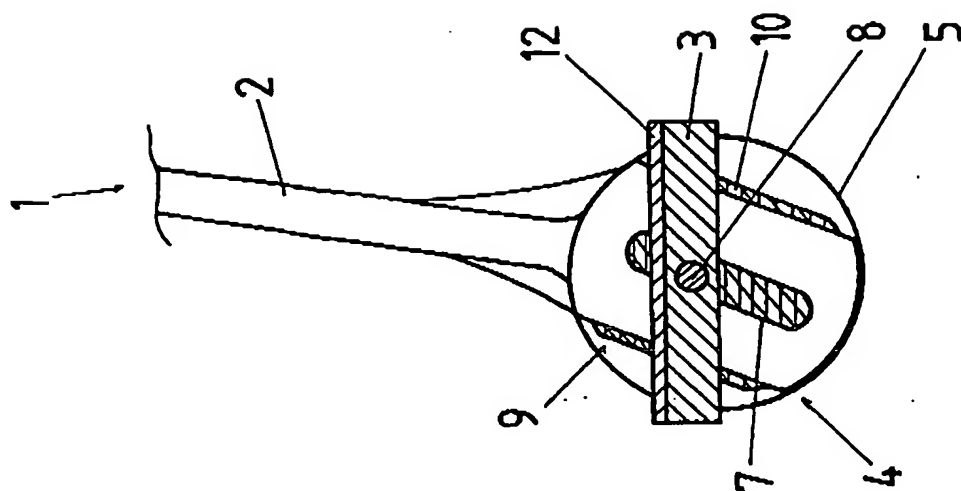


Fig-3



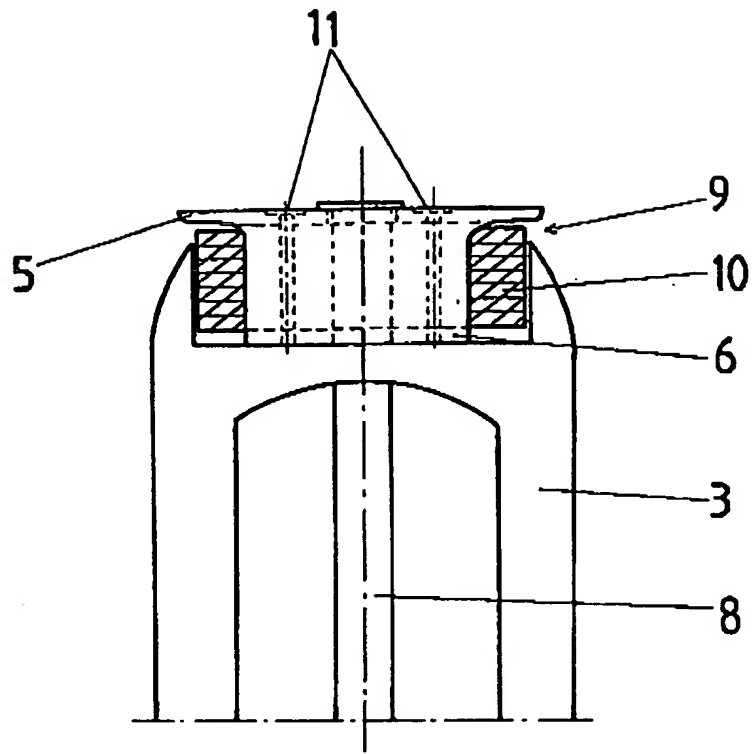


Fig-4

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ BLACK BORDERS

☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☐ FADED TEXT OR DRAWING

☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING

☐ SKEWED/SLANTED IMAGES

☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☒ LINES OR MARKS ON ORIGINAL DOCUMENT

☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**